

CORRECTED VERSION

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number
WO 2005/047057 A3

(51) International Patent Classification⁷: B60N 2/66 (74) Agent: WILKE, James, A.; FOLEY & LARDNER LLP, 777 East Wisconsin Avenue, Milwaukee, WI 53202 (US).

(21) International Application Number: PCT/US2004/036912 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 5 November 2004 (05.11.2004) (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English (26) Publication Language: English


(30) Priority Data: 60/519,304 11 November 2003 (11.11.2003) US

(71) Applicant (for all designated States except US): JOHNSON CONTROLS TECHNOLOGY COMPANY [US/US]; 650 Waverly, Holland, MI 49423 (US).

(72) Inventors; and (75) Inventors/Applicants (for US only): MICHALAK, Eric, Bernard [US/US]; 34326 Sheridan, Westland, MI 48185 (US). BENZING, Robert, Michael [US/US]; 5161 Blissfield Highway, Britton, MI 49229 (US). HENSEL, David [US/US]; 6427 Connaught Court, Canton, MI 48187 (US).

[Continued on next page]

(54) Title: SEAT BACK ADJUSTMENT MECHANISM

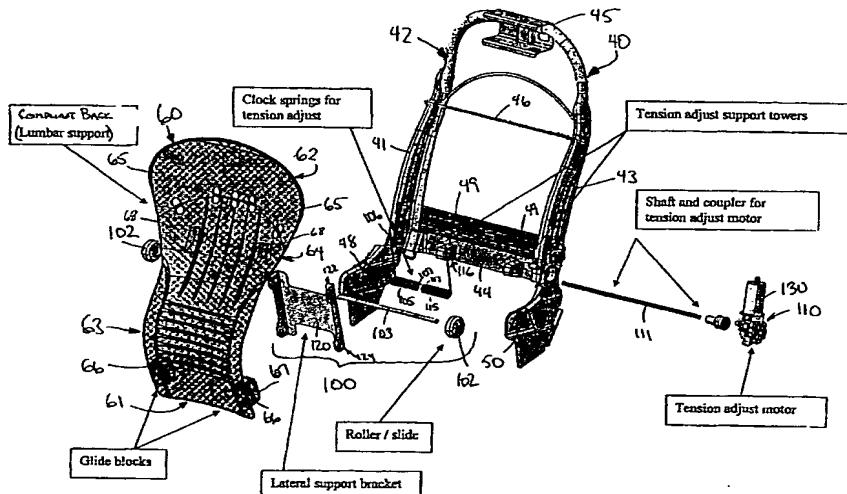

(57) Abstract: A seat (10) for use by an occupant in a vehicle. The seat includes a seat base (12) configured to be supported in the vehicle. A back frame (40) including a first transverse member (46), a first side member (41) and a second side member (43), wherein the first transverse member interconnects each of the side members at a location toward an upper end of the back frame. The back frame (40) further includes a second transverse member (44) interconnecting the first (41) and second (43) side members a spaced distance from the first transverse member. A compliant back member (60) having a first end operably connected to the first transverse member (46) and a second end operably connected to the second transverse member (44). A biasing member (100) having a first end operatively engaging the compliant back member and a second end being anchored with respect to the back frame wherein when a seat occupant's back applies a force to the compliant back member, the biasing member applies a reaction force.

WO 2005/047057 A3

**Published:**

— *with international search report*

(88) Date of publication of the international search report:

10 November 2005

(48) Date of publication of this corrected version:

22 December 2005

(15) Information about Correction:

see PCT Gazette No. 51/2005 of 22 December 2005, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.